



定格: 300V、80

ロボットケーブル IRC UL2464-SB

対数 P	導体		絶縁体		シース		最大導体抵抗 (20) / km	最小絶縁抵抗 (20) M · km	試験電圧 V · 1分
	サイズ	構成 素線数 / 素線径	厚さ mm	外径 mm	厚さ mm	仕上外径 約mm			
2	23AWG (0.3mm ²)	3/20/0.08	0.45	1.8	1.1	9.4	70.6	10	2000
3						9.9			
4						10.7			
5						11.7			
6						12.6			
8						14.6			
10						15.9			
15						18.3			
20						20.5			
2						20AWG (0.5mm ²)			
3	10.7								
4	11.6								
5	12.6								
6	13.7								
8	15.9								
10	17.5								
15	20.2								
2	18AWG (0.8mm ²)	6/28/0.08	0.45	2.2	1.1	10.8	25.2	10	2000
3						11.4			
4						12.5			
5						13.6			
6						14.8			
8						17.4			
10						18.9			
15						21.9			

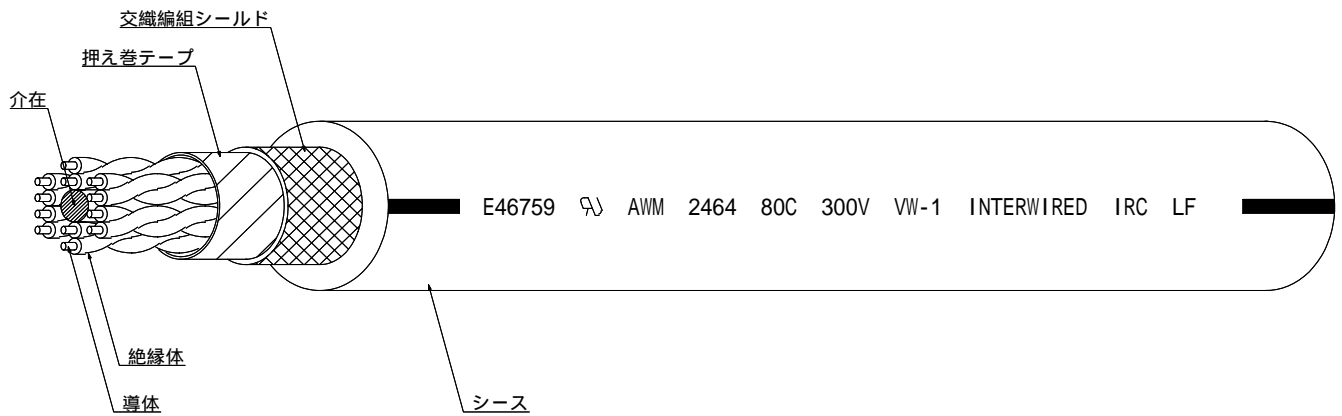

ケーブル断面図

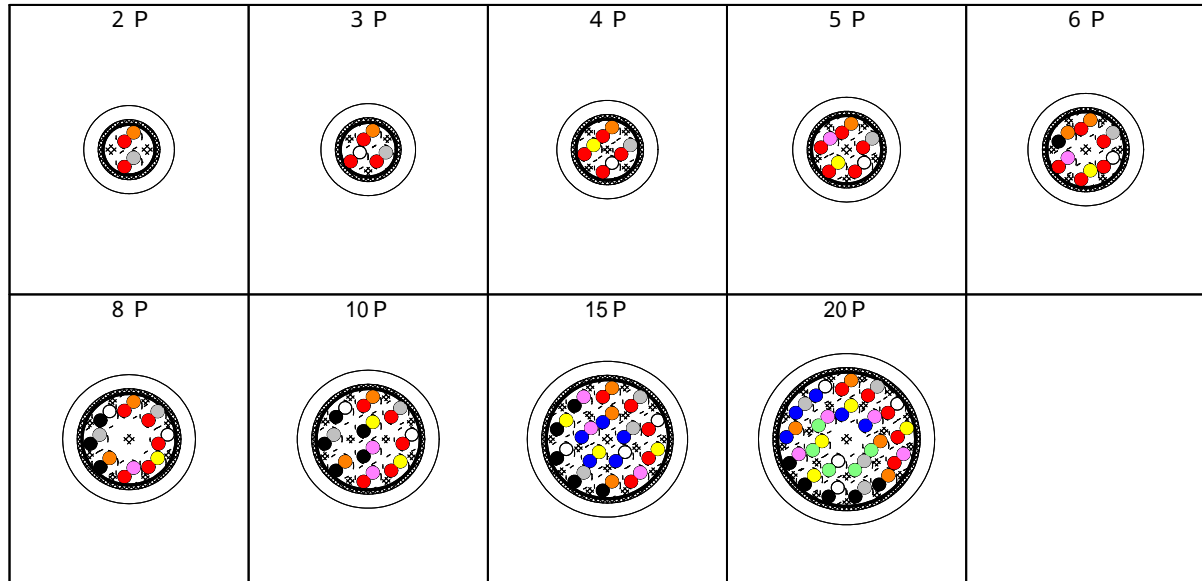

線心識別

対No.	第1芯	第2芯
1	橙	赤
2	灰	赤
3	白	赤
4	黄	赤
5	桃	赤
6	橙	黒
7	灰	黒
8	白	黒
9	黄	黒
10	桃	黒
11	橙	青
12	灰	青
13	白	青
14	黄	青
15	桃	青
16	橙	若草
17	灰	若草
18	白	若草
19	黄	若草
20	桃	若草