




TZ-SV-FR-N [同心形]

公称 断面積 mm <sup>2</sup>	心数	導体		絶縁体外径 mm	しゃへい		シース		仕上外径 約mm	概算 重量 kg/km
		構成 素線数/素線径	材質		厚さ mm	材質	厚さ mm	色		
0.2	4C	7/0.18	TZ	1.0	0.025	AL/PET	黒	0.85	4.2	26
	6C							0.85	4.8	33
	12C							0.85	6.0	53
	15C							0.9	6.6	64
	24C							0.95	8.0	94
	36C							0.95	9.0	128
	50C							1.25	11.0	184
	60C							1.3	11.7	216

・ 6 C 断面図

・ 12 C 断面図

・ 15 C 断面図

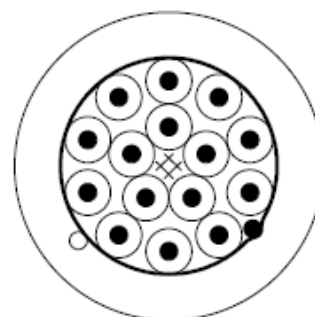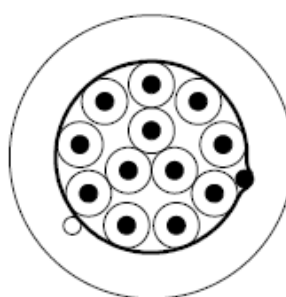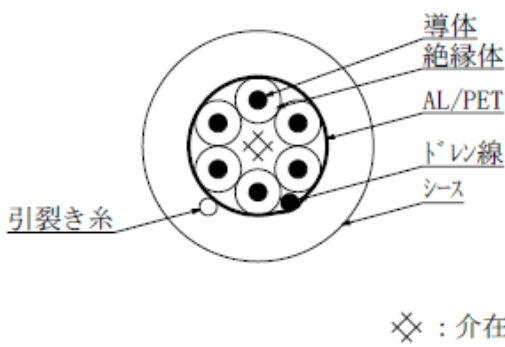

項目		TZ-SV-FR-N 0.2mm <sup>2</sup>
導体抵抗	Ω/km, 20°C	110 以下
耐電圧	V・1分 (AC)	500
絶縁抵抗	MΩ・km, 20°C	20 以上